

Specifications

Model	TMA-1000X4i
CTA-2006 Dynamic Power* Rating	250W x 4 @ 4Ohm 300W x 4 @ 2Ohm 600W x 2 @ 4Ohm Bridged
CTA-2006 Continuous Power Rating	200W x 4 @ 4Ohm 200W x 4 @ 2Ohm 400W x 2 @ 4Ohm Bridged
THD @ Rated Power	<1.0%
S/N Ratio 1Wrms - A-weighted	>100dB (MUTE)
S/N Ratio Rated Wrms - A-weighted	>120dB (MUTE)
Frequency Response	20Hz - 20kHz +/- 3dB
Input Type	A2B Digital Bus
Low-pass Crossover	Adjustable Freq. 24dB/oct.
High-pass Crossover	Adjustable Freq. 24dB/oct.
Preset Tuning	Rockford Fosgate Stage Kits
Power Connections	4 AWG
Fuse Rating	60A
Operating Voltage Range	9-16VDC
Topology / Class	AD
IP Rating	IPX4
Warranty	2 YEAR
Visual Indicators	RED SOLID: Normal Operation RED FLASH: Fault (“Active Recovery” Enabled)
	BLUE SOLID: BLE Connected
	BLUE FLASH: BLE Activity
	GREEN FLASH: A2B Activity



DYNAMIC
POWER



***Dynamic Power** indicates actual, usable power delivered by the amplifier to the speakers when listening to music. Dynamic power ratings are based on CTA-2006 industry standards. Dynamic power has been provided to indicate the actual RMS power output performance of the amplifier in the real world.

What is the IPX4? It is the testing method applied to verify this product will withstand splashing water from all directions and from all angles.

CTA-2006

Power ratings on Rockford Fosgate amplifiers conform to CTA-2006 industry standards. These guidelines mean your amplifier's output power ratings are **REAL** POWER numbers, not inflated marketing ratings.

Quickstart guide



Serial Number: _____ Date of Purchase: _____



TMA-1000X4i

DIGITAL 4-CHANNEL
IPX4 AMPLIFIER

FOR HARLEY-DAVIDSON®

POWER



Warranty

Rockford Corp. offers a limited warranty on Rockford Fosgate products on the following terms:

Length of Warranty

POWER Amplifiers – 2 Years
PUNCH® & PRIME® Amplifiers – 1 Year
Speakers, Signal Processors and Accessories – 1 Year
All marine, motorcycle, motorsport products - 2 Years
Any Factory Refurbished Product – 90 Days (receipt required)

What is Covered

This warranty applies only to Rockford Fosgate products sold to consumers by authorized Rockford Fosgate dealers in the United States of America. Products purchased by consumers from an Authorized Rockford Fosgate Dealer in another country are covered only by that country's Distributor and not by Rockford Corporation.

Who is Covered

This warranty covers only the original purchaser of Rockford product purchased from an authorized Rockford Fosgate dealer in the United States. In order to receive service, the purchaser must provide Rockford with a copy of the receipt stating the customer name, dealer name, product purchased and date of purchase. Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Rockford's discretion.

What is Not Covered

- Damage caused by accident, abuse, improper operations,water, theft, shipping.
- Any cost or expense related to the removal or reinstallation of product.
- Service performed by anyone other than Rockford or an Authorized Rockford Fosgate Service Center.
- Any product which has had the serial number defaced, altered, or removed.
- Subsequent damage to other components.
- Any product purchased outside the U.S.
- Any product not purchased from an Authorized Rockford Fosgate Dealer.

Limit on Implied Warranties

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Rockford Fosgate any other liability in connection with the sale of the product.

How to Obtain Service

Please call 1-800-669-9899 for Rockford Customer Service. You must obtain an RA# (Return Authorization number) to return any product to Rockford Fosgate. You are responsible for shipment of product to Rockford.

EU Warranty

This product meets the current EU warranty requirements, see your Authorized dealer for details.




600 South Rockford Drive • Tempe, Arizona 85288 United States
Direct: (480) 967-3565 • Toll Free: (800) 669-9899
ROCKFORDFOSGATE.COM

05062025

1230-82908-01

Printed in ()

SCAN QR-CODE FOR:
Product Details • Specifications
Owners Manual • Installation Video





TMA1000X4I

Installation assistance available at:
www.rockfordfosgate.com/rfttech

RFTTECH

*VISIT **ROCKFORDFOSGATE.COM** FOR A COMPLETE HARLEY-DAVIDSON® FITMENT GUIDE

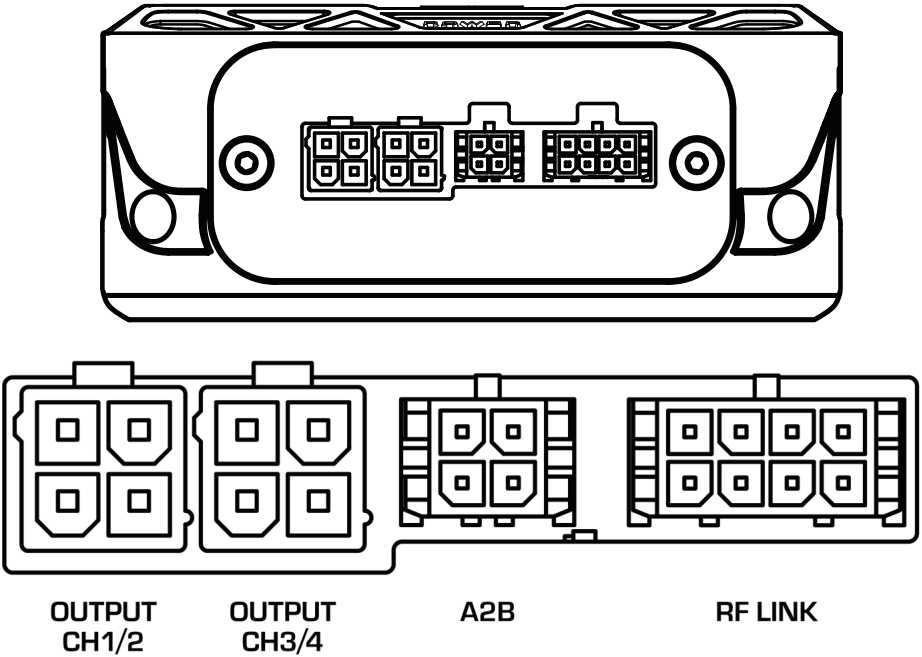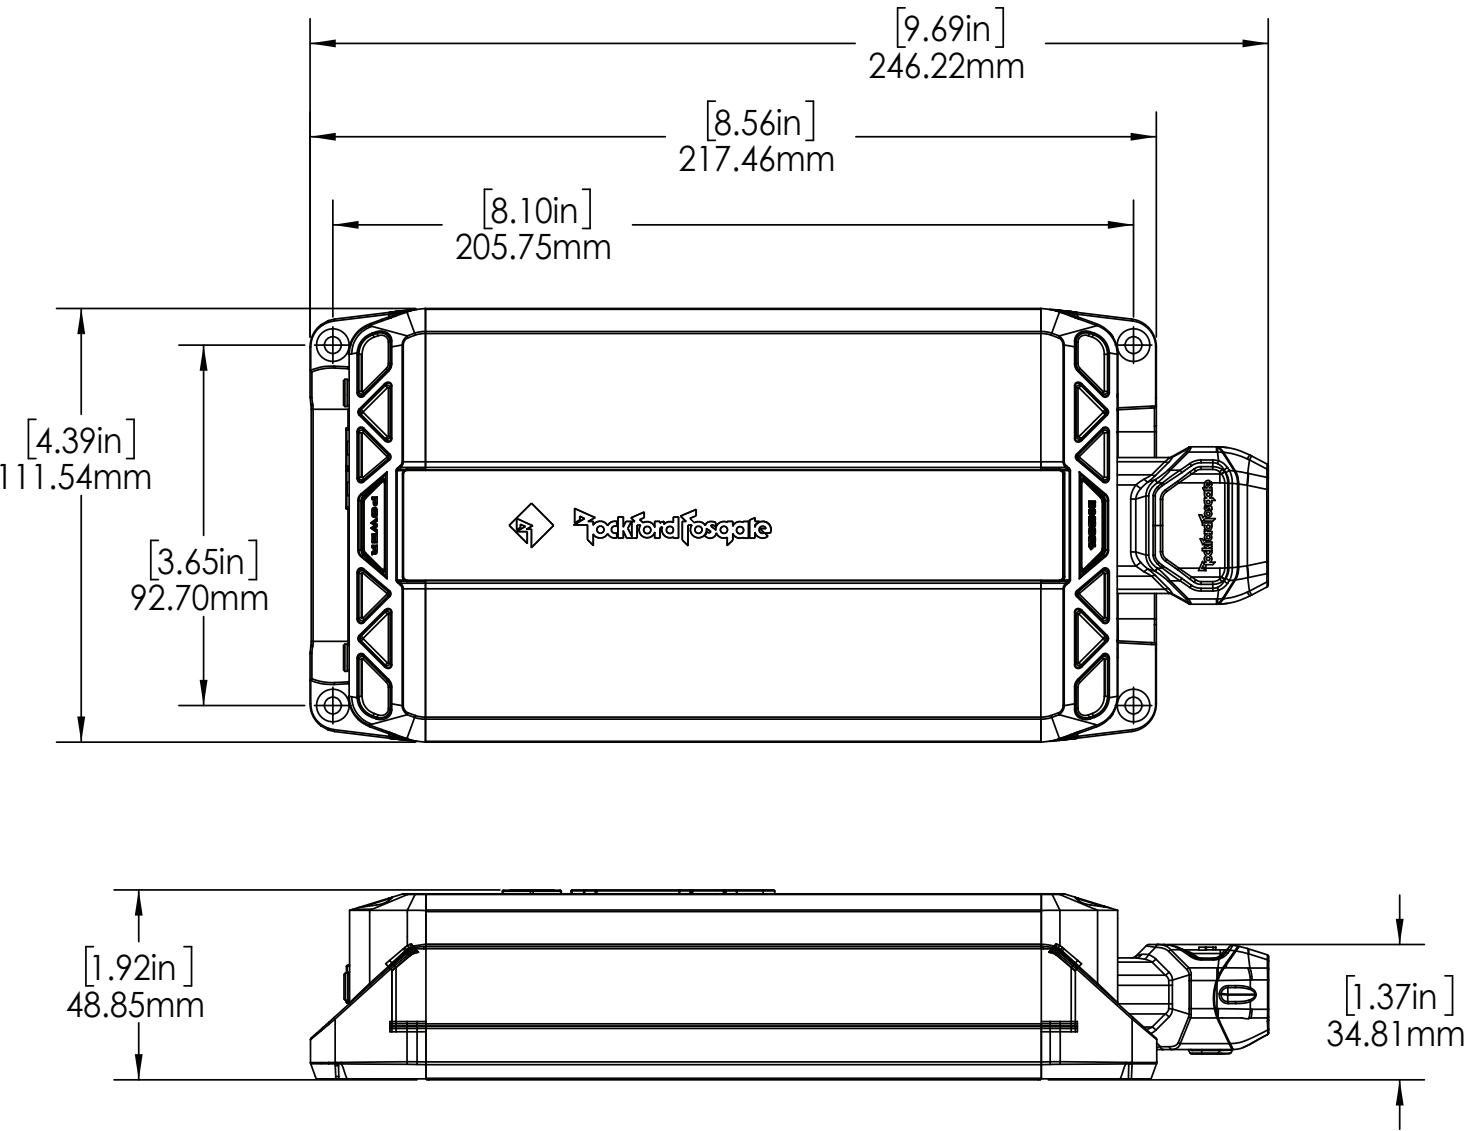

Installation Considerations

This section focuses on some considerations for installing your amp.

⚠ WARNING

If you feel unsure about installing this system yourself, have it installed by a qualified technician.

When drilling holes, make sure what is on the other side. Be sure that any electrical, fuel lines or any other important components are free and clear from the area.

⚠ CAUTION

Before installation, disconnect the battery negative (-) terminal to prevent damage to the unit, fire and/or possible injury.

Before beginning any installation, follow these simple rules:

Be sure to carefully read and understand the instructions before attempting to install anything.

- Consult your service manual for model specific information. Models may differ from year to year depending on factory options and aftermarket accessories added.
- With the addition of an amplifier, be sure that your current charging system is in proper working order.
- Visit rockfordfosgate.com for more comprehensive product information.
- Visit our YouTube channel for comprehensive installation videos demonstrating complete installation guides and install tips.

NEED HELP WITH YOUR INSTALLATION?



YOUTUBE VISIT OUR CHANNEL FOR A COMPLETE INSTALLATION VIDEO AND OTHER TIPS
WWW.YOUTUBE.COM/USER/ROCKFORDFOSGATE